

Shower System 1-100-150 **Specification Submittal**



Feature Highlights

- Symmons shower system with a lever handle.
- Symmons Safetymix pressure balancing 3-port #4-500 mixing valve with adjustable stop screw to limit handle turn.
- Senior showerhead #4-150 with semi adjustable flood or mist spray
- Standard flow rate 2.5 gpm (9.5 L/min)
 Optional lower flow rate restrictor available
- Spray face is non-clogging and non-removable
- Mounting fasteners for showerhead are vandal resistant recessed hex socket type
- Polished chrome finish

Model Numbers

□ 1-100-150 Shower System with Symmons
Safetymix #4-500 pressure balancing
mixing valve and showerhead #4-150

Finish Options

Append appropriate -suffix to model number.

- Polished chrome finish (standard)

Standards / Certifications

ASME A112.18.1/CSA B125.1



Warranty

- Limited Lifetime to the original end purchaser in residential/consumer installations.
- 5 years for commercial installations






Options / Modifications

numl	er.
n	uml

- BX Back connection with integral stopsExternal volume control on showerh
 - -E External volume control on showerhead
- ☐ -G Dial thermometer
- -VP Vandal resistant escutcheon screws in place of standard screws
- -X Integral stops allows water shut off at valve for service. Recommended for use on all multiple commercial installations
- ☐ -X-3/4" 3/4" valve to increase flow approximately 20%
- ☐ -X-CHKS Integral check stops for use in installations where a positive shut-off device is used downstream of mixing valve

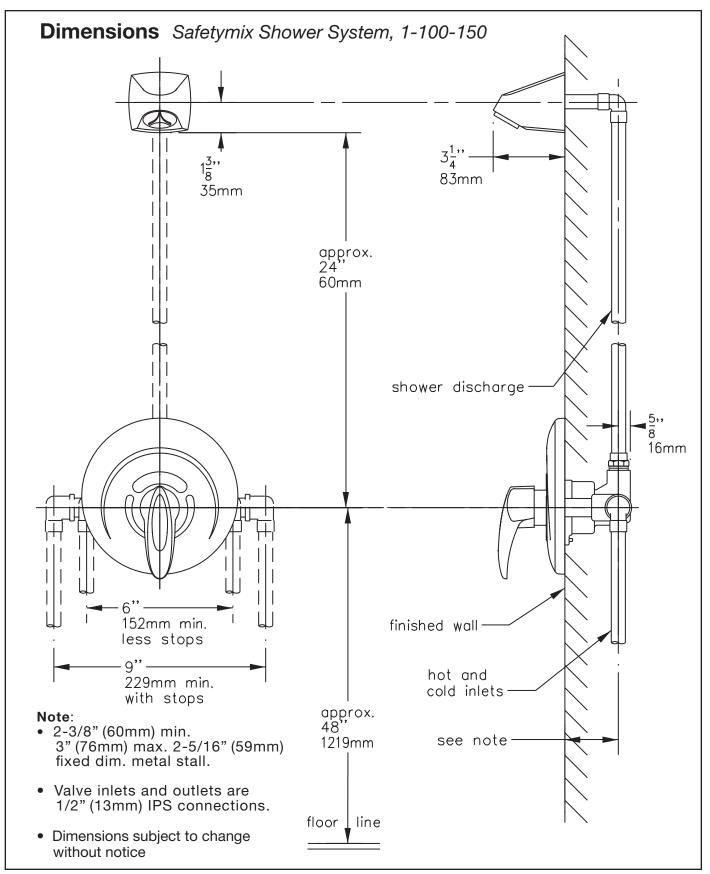

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184

Phone: (800) 796-6667 • Fax: (800) 961-9621

Website: symmons.com ■ Email: gethelp@symmons.com

