Location: SYMMONS® Origins® the smart choice™

9600-PLR-TRM, 9600PLRTRMTC Shower Valve Trim Specification Submittal

Feature Highlights

- Origins Shower Valve Trim
- Requires Temptrol[®] Pressure Balancing Shower Valve
- Metal lever handle
- Diverter tub spout not included
- Showerhead not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9600PLRTRMTC)

Model Numbers

□ 9600-PLR-TRM

Shower Valve Trim, Temptrol Pressure Balancing Shower Valve ordered separately

9600PLRTRMTC

Shower Valve Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

• ASME A112.18.1/CSA B125.1



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

5 Years - for industrial/commercial installations.

Refer to www.symmons.com/warranty for complete warranty information. Go to www.symmons.com/register to register your Symmons product.




Options/Modifications

-В		Brass escutcheon (chrome only)
-D		Brass dome cover (chrome only)
-LAM		Metal finish insert handle
-LP	6	Loop handle
-OP		13" oval plate
-REB		Rebuild trim kit, includes TA-10 and TA-4
-VP		Vandal resistant escutcheon screws in place of
		standard screws
-STN		Satin Nickel finish

Note: Append appropriate -suffix to model number.



Dimensions

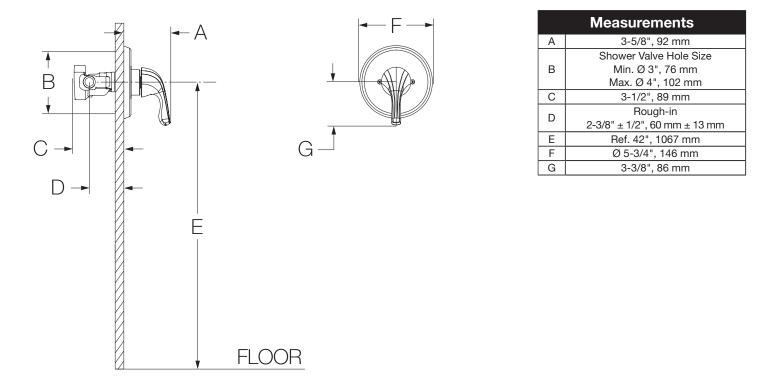

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see D as reference).
- 4) Dimensions subject to change without notice.