# Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0 GPF

#### **FEATURES**

- Wall-mounted
- Elongated front bowl
- Optional CeFiONtect<sup>™</sup> glaze prevents debris from sticking to ceramic surfaces, making them easier to clean
- Clear glazed trapway coating

# **MODELS**

- CT708U
   Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat
- CT708UG
   Commercial wall-mounted toilet with 1-1/2' top spud inlet, less seat with CeFiONtect ceramic glaze

#### **ADDITIONAL ITEMS**

- SC534 seat
- SC134 seat
- THU111 Retro-fit mounting bolt cap set (4 pcs)

ECOPOWER® FLUSH VALVES		
Exposed		
TET1UA32#CP	1.0 GPF	
Exposed 24" Breaker		
TET6UA32#CP	1.0 GPF	
Concealed 14" x 12"		
TET2UA32#CP	1.0 GPF	
Concealed 4" x 4"		
TET3UA32#SS	1.0 GPF	

# **COLORS/FINISHES**

Standard #01 Cotton





#### PRODUCT SPECIFICATION

The wall-mounted, low consumption siphon jet flushing toilet shall be 1.0 GPF (3.8 LPF) when paired with a 1.0 GPF flush valve. Toilet shall have optional CeFiONtect ceramic glaze. Toilet can be mounted at ADA height. Toilet shall be TOTO Model CT708U\_\_\_\_\_.

#### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant







# Commercial Flushometer Top Spud Wall-Hung Toilet – 1.0 GPF


#### **SPECIFICATIONS**


Water Use	1.0 GPF (3.8 LPF)
Flush System	Siphon Jet Flushing Action
Water Surface	12" x 9-1/4"
Water	Min: 35 psi (Flowing)
Pressure	Max: 80 psi (Static)
Min. Flow Rate	24 GPM
Trap Diameter	2-1/8"
Trap Seal	2-5/8"
Material	Vitreous China
Warranty	One Year Limited Warranty
Shipping Weight	56 lbs
Shipping Dimensions	26-1/4"L x 15-5/8" W x 16"H

#### **INSTALLATION NOTES**

Spuds are unique for TOTO product. For replacement spuds, contact TOTO for part number THU073R

### **DIMENSIONS**

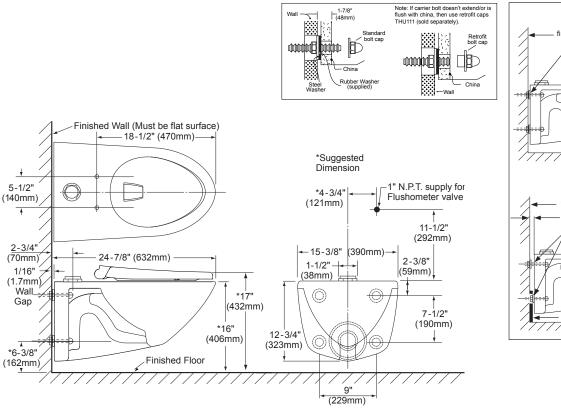



TOTO:

These dimensions and specifications are subject to change without notice