
SYMMONS® DS Creations

SWM-0735-TCR-1.5-TRM (CDSWM0735-TCR-1.5-TRM) Two Handle Wall Mounted Lavatory Faucet

Installation Guide

Model Numbers	Specification		
 SWM-0735-TCR-1.5-TRM Two Handle Wall Mounted Lavatory Faucet S-2747-BODY Wall Mounted Valve Body Assembly 	Two Handle Wall Mounted Lavatory Faucet featuring 8" mount shall include quarter turn ceramic cartridges, 1/2" rigid copper connections and 1.5 gpm (5.7 L/min) aerator. Faucet shall be made from metal construction, plated in standard polished chrome finish.		
Modifications			
□ -1.0 C 1.0 gpm (3.8 L/min) flow restrictor	Warranty		
Note: Append appropriate -suffix to model number.	 Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information. 		


Dimensions

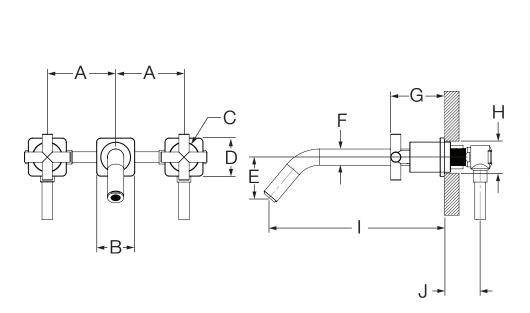

Measurements		
Α	4", 102 mm	
В	2-1/4", 57 mm	
С	Ø 1-3/4", 44 mm	
D	2-11/16", 68 mm	
Е	2-3/8", 60 mm	
F	Ø 15/16", 24 mm	
G	3-1/8", 79 mm	
н	(3x) Hole Size	
	Ø 1-7/8", 48 mm	
I	10-1/4", 260 mm	
J	2-1/8" ± 3/8", 54 mm ± 10 mm	



Parts Breakdown

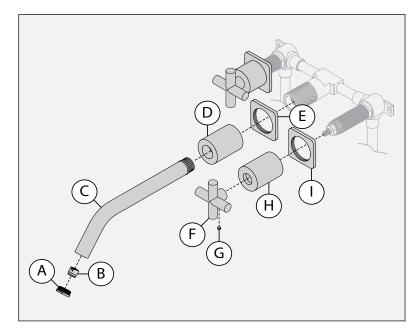

Notes:

- 1) Apply a bead of silicone around the perimeter of trim installed flush to sink.
- 2) Apply plumber tape to all threaded connections.

Replacement Parts				
Item	Description		Part Number	
A	Aerator Housing		BL-216	
С	Spout		TIE-210	
B 1.5 Aerator		or	LN-746	
	1.0 Aerator		RL-197	
D	Spout Escutcheon		RL-309	
E	Wall Flange			
F	Handle		RL-307	
G	Set Screv	N 112 007		
H	Handle Escuto	RL-308		
	Wall Flange		nL-300	
Tools Required for Installation				
Adjustable Wrench				
Allen Wrench: Handle (3 mm)				
Plumber Tape		<u></u>		
Silicone			C	

WARNING: This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.